


AIS FRAMELESS CABINET SPECIFICATIONS

CABINET CONSTRUCTION

- 5/8" industrial grade particle board, conforming to ANSI 208.1, CARB phase 2 TSCA Title VI.
- Dowel and glue joinery of cabinet components.
- 1/8" MDF Back.
- 5/8" thick adjustable shelves, base and wall cabinets.

DOOR, DRAWER BOXES AND HARDWARE

- Euro Concealed, 6 way adjustable, 110 degree soft close hinges.
- 5/8" drawer box, with 1/4" thick MDF drawer bottom with full extension undermount or 3/4 extension epoxy drawer guides.
- Doors and drawer fronts are 3/4" thick.

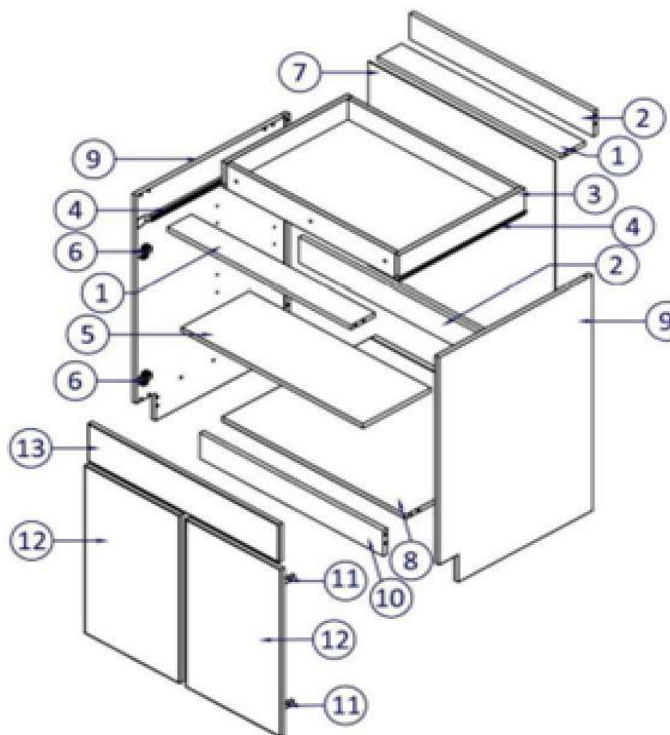

BASE CABINET CONSTRUCTION

1. 5/8" stretcher
2. 5/8" nailer
3. 5/8" drawer box
4. Drawer guides, epoxy shown.
5. 5/8" thick 10" deep adjustable shelf
6. Euro style hinge plate
7. 1/8" MDF back panel
8. 5/8" bottom
9. 5/8" end panel
10. 5/8" toekick
11. Soft close, concealed hinges
12. 3/4" thick door
13. 3/4" thick drawer front